


STRATO Power LED 1W Monochromatic DATA-SHEET

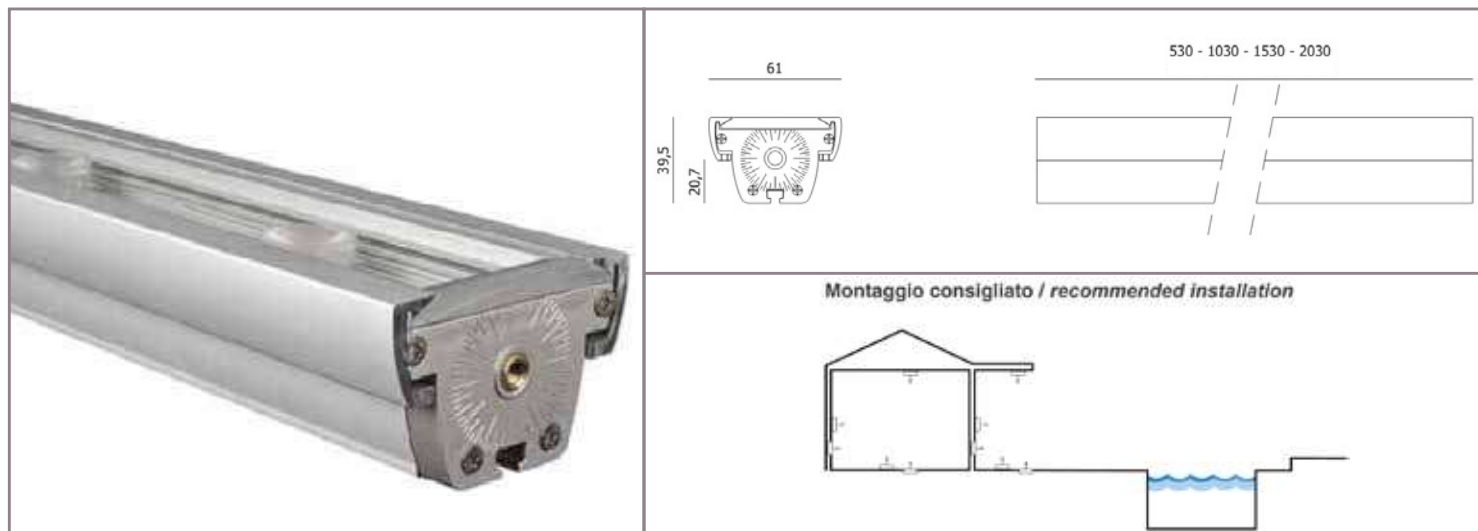

PRODUCT DESCRIPTION:

High performance professional lighting system for indoor and outdoor wall grazing. Advanced optical glare control. Body finished aluminium anodized, with 5mm transparent PMMA. UV resistance of all materials.

TECHNICALS FEATURES:

Materials	Aluminium ANTICORODAL EN AW-6060 galvanized 20 micron ; Stainless steel AISI 316L ; 5mm Transparent PMMA
Finishes	Anodized aluminium
Power Supply	24 Vdc constant voltage ($\pm 5\%$)
Power	22 W/m (pitch 50) ; 12 W/m (pitch 100)
Light Source	Power LED
Pitch	50 mm ; 100 mm
Color Temperature	2700 K ; 3000 K ; 4000 K
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21)
Optics	9° ; 24° ; 43° ; elliptical 40°x13° ; transparent diffuser 82° ; elliptical+louver 38°x13°
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 C°
Ts surface temperature	≤ 65 °C
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18(0,75mm ²) (Red;Black)+1xAWG20(0,5mm ²) (Violet) L. 1 m.
Weigth	2 Kg/m
Installations	Recessed (wall, floor) - surface mounted (wall, floor, ceiling)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power. Photometric data available at www.aldabra.it

STRATO Power LED 1W Monochromatic DATA-SHEET

GENERAL FEATURES:

	power (W)	length (mm)	pitch (mm)
STR.01.XXXXX.X	6	530	100
STR.02.XXXXX.X	12	1030	100
STR.03.XXXXX.X	17	1530	100
STR.04.XXXXX.X	23	2030	100
STR.09.XXXXX.X	11	530	50
STR.10.XXXXX.X	22	1030	50
STR.11.XXXXX.X	33	1530	50
STR.12.XXXXX.X	44	2030	50

OPTICAL FEATURES:


STR.XX. M XXXX.X	Narrow beam 9°
STR.XX. F XXXX.X	Medium beam 24°
STR.XX. W XXXX.X	Wide beam 43°
STR.XX. E XXXX.X	Elliptical 40°x13°
STR.XX. T XXXX.X	Transparent diffuser 82°
STR.XX. U XXXX.X	Elliptical+louver 40°x13°

LED FEATURES:

	Power LED	lm/W	Ra	Chromatic selection
STR.XX.X 27 XX.X	2700K warm white	105	>80	MacAdam 2-step
STR.XX.X 30 XX.X	3000K warm white	118	>80	MacAdam 2-step
STR.XX.X 40 XX.X	4000K neutral white	130	>80	MacAdam 2-step

FINISHES FEATURES:

STR.XX.XXX A1 .X	Anodized aluminium
-------------------------	--------------------

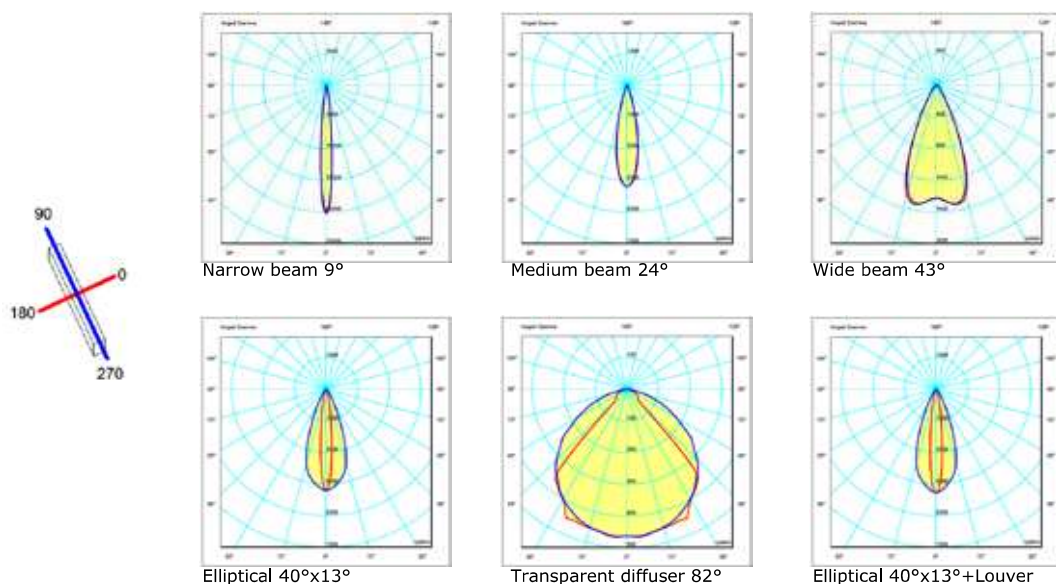

GENERAL INFORMATIONS:


Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

STRATO Power LED 1W Monochromatic DATA-SHEET

RECESSING BOXES:

CSF.0061.0
CSF.0062.0
CSF.0063.0
CSF.0064.0

standard recessing box 550 mm
standard recessing box 1050 mm
standard recessing box 1550 mm
standard recessing box 2050 mm

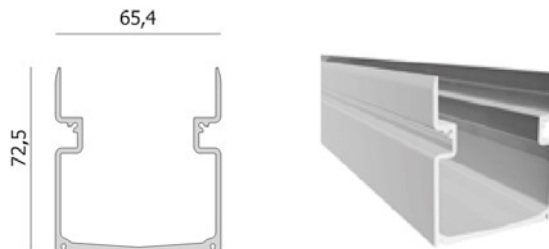

ACCESSORIES:

ACC.0065.0

couple of adjustable brackets



ACC.0066.0

fixing kit in recessing box




ACC.0080.0

couple of end caps for recessing box



ACC.0081.0

power supply box fixing brackets




ACC.0003.0

alignment kit for housing boxes




ACC.0027.1*

power supply box
220-240 Vac 50/60 Hz
30W SELV - ENEC -
CE - IP67




ACC.0029.1*

power supply box
220-240 Vac 50/60 Hz
60W SELV - ENEC -
CE - IP67




ACC.0078.1*

power supply box
220-240 Vac 50/60 Hz
100W SELV - ENEC -
CE - IP67



STRATO Power LED 2W Monochromatic DATA-SHEET

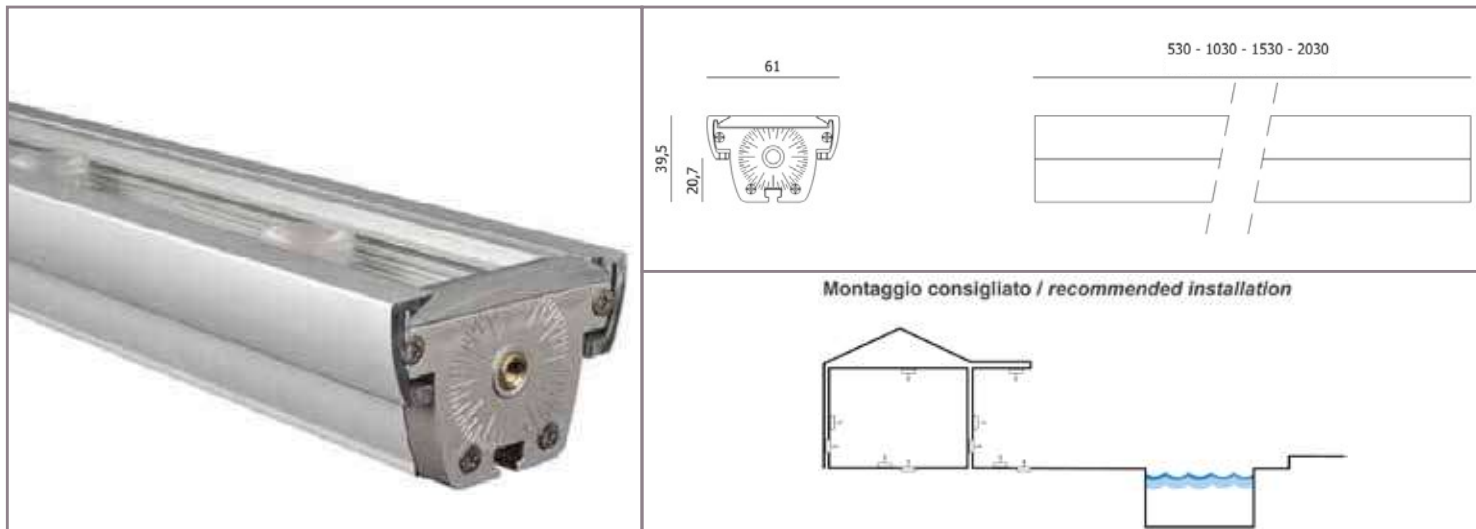

PRODUCT DESCRIPTION:

High performance professional lighting system for indoor and outdoor wall grazing. Advanced optical glare control. Body finished aluminium anodized, with 5mm transparent PMMA. UV resistance of all materials.

TECHNICALS FEATURES:

Materials	Aluminium ANTICORODAL EN AW-6060 galvanized 20 micron ; Stainless steel AISI 316L ; 5mm Transparent PMMA
Finishes	Anodized aluminium
Power Supply	24 Vdc constant voltage (±5%)
Power	44 W/m (pitch 50) ; 24 W/m (pitch 100)
Light Source	Power LED
Pitch	50 mm ; 100 mm
Color Temperature	2700 K ; 3000 K ; 4000 K
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21)
Optics	9° ; 24° ; 43° ; elliptical 40°x13° ; transparent diffuser 82°
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 C°
Ts surface temperature	≤ 65 °C
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18(0,75mm ²) (Red;Black)+1xAWG20(0,5mm ²) (Violet) L. 1 m.
Weigth	2 Kg/m
Installations	Recessed (wall, floor) - surface mounted (wall, floor, ceiling)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power. Photometric data available at www.aldabra.it

STRATO Power LED 2W Monochromatic DATA-SHEET

GENERAL FEATURES:

	power (W)	length (mm)	pitch (mm)
STR.05.XXXXX.X	12	530	100
STR.06.XXXXX.X	24	1030	100
STR.07.XXXXX.X	35	1530	100
STR.08.XXXXX.X	47	2030	100
STR.13.XXXXX.X	22	530	50
STR.14.XXXXX.X	44	1030	50
STR.15.XXXXX.X	70	1530	50
STR.16.XXXXX.X	94	2030	50

OPTICAL FEATURES:


STR.XX.MXXXX.X	Narrow beam 9°
STR.XX.FXXXX.X	Medium beam 24°
STR.XX.WXXXX.X	Wide beam 43°
STR.XX.EXXXX.X	Elliptical 40°x13°
STR.XX.TXXXX.X	Transparent diffuser 82°

LED FEATURES:


	Power LED	lm/W	Ra	Chromatic selection
STR.XX.X27XX.X	2700K warm white	105	>80	MacAdam 2-step
STR.XX.X30XX.X	3000K warm white	118	>80	MacAdam 2-step
STR.XX.X40XX.X	4000K neutral white	130	>80	MacAdam 2-step

FINISHES FEATURES:


STR.XX.XXXA1.X	Anodized aluminium
----------------	--------------------





Narrow beam 9°




Narrow beam 24°



Narrow beam 43°



Elliptical 40°x13°



Transparent diffuser 82°

GENERAL INFORMATIONS:


Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must to be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

STRATO Power LED 2W Monochromatic DATA-SHEET

RECESSING BOXES:

CSF.0061.0
CSF.0062.0
CSF.0063.0
CSF.0064.0

standard recessing box 550 mm
standard recessing box 1050 mm
standard recessing box 1550 mm
standard recessing box 2050 mm

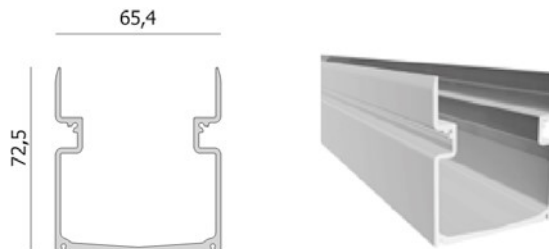

ACCESSORIES:

ACC.0065.0

couple of adjustable brackets



ACC.0066.0

fixing kit in recessing box




ACC.0080.0

couple of end caps for recessing box



ACC.0081.0

power supply box fixing brackets




ACC.0003.0

alignment kit for housing boxes




ACC.0027.1*

power supply box
220-240 Vac 50/60 Hz
30W SELV - ENEC -
CE - IP67




ACC.0029.1*

power supply box
220-240 Vac 50/60 Hz
60W SELV - ENEC -
CE - IP67




ACC.0078.1*

power supply box
220-240 Vac 50/60 Hz
100W SELV - ENEC -
CE - IP67



STRATO Mid Power LED Monochromatic DATA-SHEET

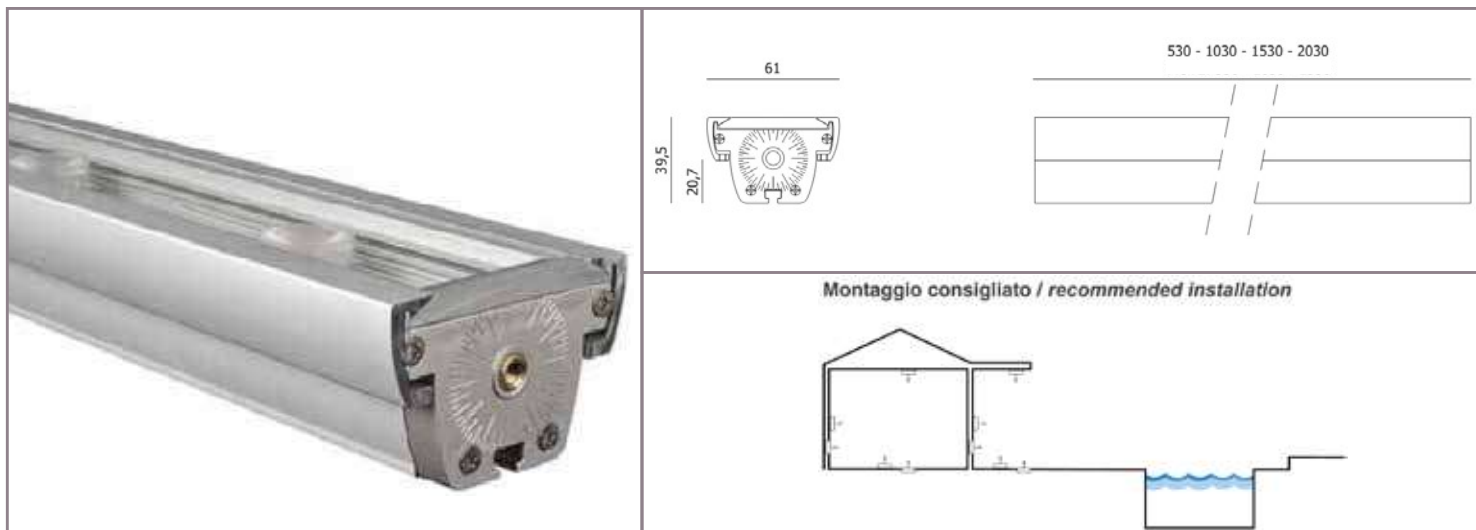

PRODUCT DESCRIPTION:

High performance professional lighting system for indoor and outdoor wall grazing. Advanced optical glare control. Body finished aluminium anodized, with 5mm transparent PMMA. UV resistance of all materials.

TECHNICALS FEATURES:

Materials	Aluminium ANTICORODAL EN AW-6060 galvanized 20 micron ; Stainless steel AISI 316L ; 5mm Transparent PMMA
Finishes	Anodized aluminium
Power Supply	24 Vdc constant voltage (±5%)
Power	12 W/m
Light Source	Mid Power LED
Pitch	20 mm
Color Temperature	2700 K ; 3000 K ; 4000 K
Ra	> 80
Chromatic Selection	Mac-Adam 3-step
Lifetime	> 50000 h (TM21)
Optics	Opal diffuser 113°
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 C°
Ts surface temperature	≤ 65 °C
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18(0,75mm ²) (Red;Black)+1xAWG20(0,5mm ²) (Violet) L. 1 m.
Weigth	2 Kg/m
Installations	Recessed (wall, floor) - surface mounted (wall, floor, ceiling)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power. Photometric data available at www.aldabra.it

STRATO Mid Power LED Monochromatic DATA-SHEET

GENERAL FEATURES:

	power (W)	length (mm)	pitch (mm)
STR.17.XXXXX.X	6	530	20
STR.18.XXXXX.X	12	1030	20
STR.19.XXXXX.X	18	1530	20
STR.20.XXXXX.X	24	2030	20

OPTICAL FEATURES:


STR.XX. D XXXX.X	Opal diffuser 113°
-------------------------	--------------------

LED FEATURES:

	Mid Power LED	lm/W	Ra	Chromatic selection
STR.XX.X 27 XX.X	2700K warm white	105	>80	MacAdam 3-step
STR.XX.X 30 XX.X	3000K warm white	118	>80	MacAdam 3-step
STR.XX.X 40 XX.X	4000K neutral white	130	>80	MacAdam 3-step

FINISHES FEATURES:

STR.XX.XXX A1 .X	Anodized aluminium
-------------------------	--------------------

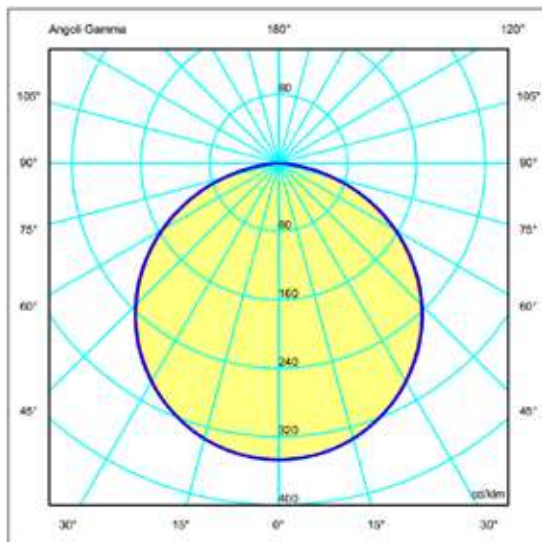

Opal diffuser 113°

GENERAL INFORMATIONS:



Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

STRATO Mid Power LED Monochromatic DATA-SHEET

RECESSING BOXES:

CSF.0061.0
CSF.0062.0
CSF.0063.0
CSF.0064.0


standard recessing box 550 mm
standard recessing box 1050 mm
standard recessing box 1550 mm
standard recessing box 2050 mm



ACCESSORIES:

ACC.0065.0

couple of adjustable brackets



ACC.0066.0

fixing kit in recessing box




ACC.0080.0

couple of end caps for recessing box



ACC.0081.0

power supply box fixing brackets




ACC.0003.0

alignment kit for housing boxes




ACC.0027.1*

power supply box
220-240 Vac 50/60 Hz
30W SELV - ENEC -
CE - IP67




ACC.0029.1*

power supply box
220-240 Vac 50/60 Hz
60W SELV - ENEC -
CE - IP67




ACC.0078.1*

power supply box
220-240 Vac 50/60 Hz
100W SELV - ENEC -
CE - IP67



STRATO Power LED DWS DATA-SHEET

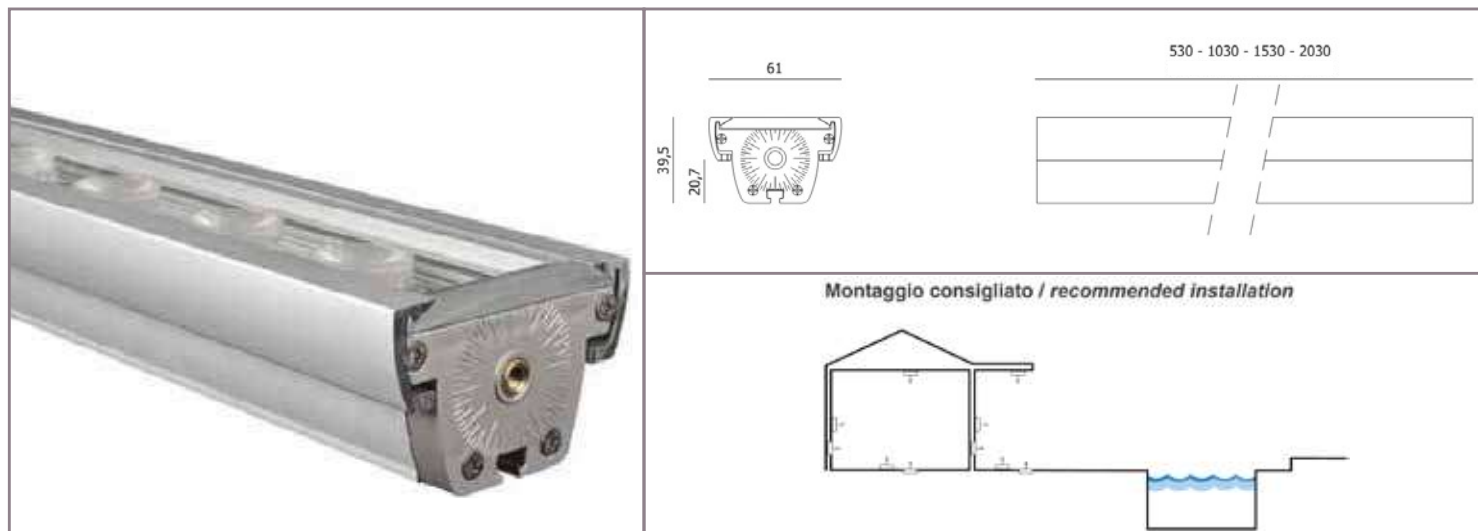

PRODUCT DESCRIPTION:

High performance professional lighting system for indoor and outdoor wall grazing. Advanced optical glare control. Body finished aluminium anodized, with 5mm transparent PMMA. UV resistance of all materials.

TECHNICALS FEATURES:

Materials	Aluminium ANTICORODAL EN AW-6060 galvanized 20 micron ; Stainless steel AISI 316L ; 5mm Transparent PMMA
Finishes	Anodized aluminium
Power Supply	24 Vdc constant voltage ($\pm 5\%$)
Power	29 W/m
Light Source	Power LED
Pitch	33 mm
Color Temperature	DWS : 2700 K \div 5000 K
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21)
Optics	7° ; 24° ; 38° ; elliptical 40°x10°
Tc metal body	< 90 °C
Ta operating temperature	- 30 \div 50 C°
Ts surface temperature	\leq 65 °C
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18(0,75mm ²) (Red;Black)+3xAWG20(0,5mm ²) (R/b, G/b, B/b) L. 1 m.
Weigth	2 Kg/m
Installations	Recessed (wall, floor) - surface mounted (wall, floor, ceiling)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power. Photometric data available at www.aldabra.it

STRATO Power LED DWS DATA-SHEET

GENERAL FEATURES:

	power (W)	length (mm)	pitch (mm)
STR.01.XXXXX.X	15	530	33
STR.02.XXXXX.X	29	1030	33
STR.03.XXXXX.X	44	1530	33
STR.04.XXXXX.X	58	2030	33

OPTICAL FEATURES:


STR.XX.MXXXX.X	Medium beam 7°
STR.XX.FXXXX.X	Medium beam 24°
STR.XX.WXXXX.X	Wide beam 38°
STR.XX.EXXXX.X	Elliptical 40°x10°

LED FEATURES:


	Power LED	lm/W	Ra	Chromatic selection
STR.XX.X98XX.X	DWS 2700K ÷ 5000K	105 ÷ 130	>80	MacAdam 2-step

FINISHES FEATURES:


STR.XX.XXXA1.X	Anodized aluminium
----------------	--------------------





Narrow beam 7°



Medium beam 24°



Wide beam 38°



Elliptical 40°x10°

GENERAL INFORMATIONS:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.



STRATO Power LED DWS

DATA-SHEET

RECESSING BOXES:

CSF.0061.0
CSF.0062.0
CSF.0063.0
CSF.0064.0

standard recessing box 550 mm
standard recessing box 1050 mm
standard recessing box 1550 mm
standard recessing box 2050 mm



ACCESSORIES:

ACC.0065.0

couple of adjustable brackets



ACC.0066.0

fixing kit in recessing box



ACC.0080.0

couple of end caps for recessing box




ACC.0003.0

alignment kit for housing boxes



STRATO Power LED RGB DATA-SHEET

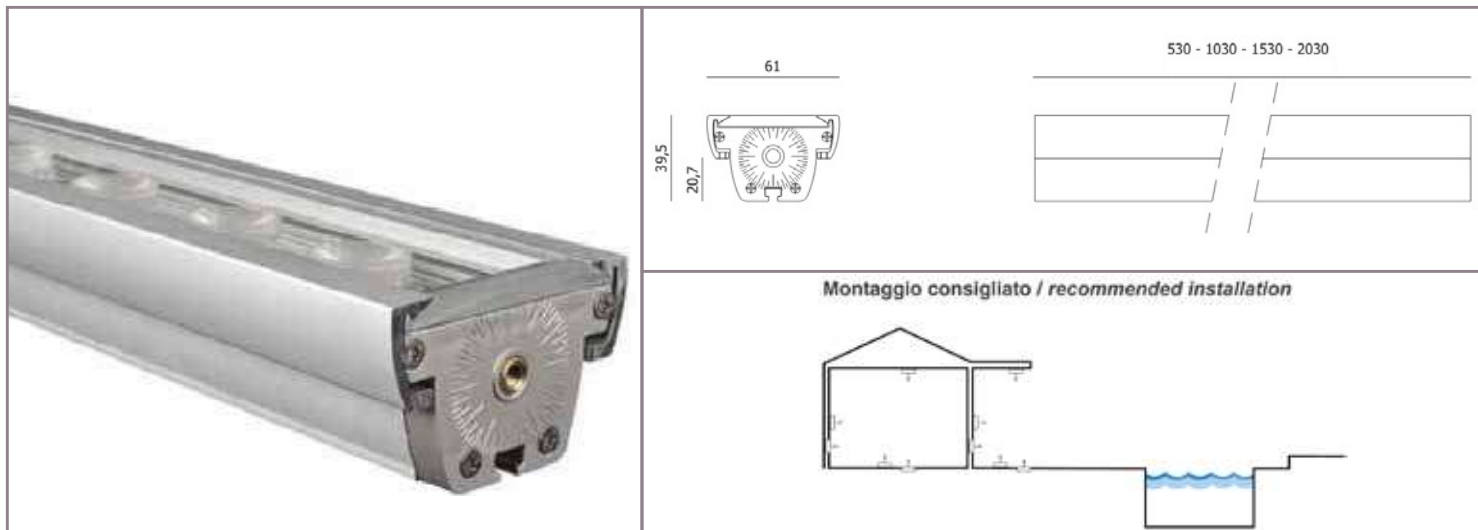

PRODUCT DESCRIPTION:

High performance professional lighting system for indoor and outdoor wall grazing. Advanced optical glare control. Body finished aluminium anodized, with 5mm transparent PMMA. UV resistance of all materials.

TECHNICALS FEATURES:

Materials	Aluminium ANTICORODAL EN AW-6060 galvanized 20 micron ; Stainless steel AISI 316L ; 5mm Transparent PMMA
Finishes	Anodized aluminium
Power Supply	24 Vdc constant voltage ($\pm 5\%$)
Power	29 W/m
Light Source	Power LED
Pitch	33 mm
Dominant Wavelength	R=622nm, G=530nm, B=470nm
Lifetime	> 50000 h (L80B20)
Optics	7° ; 24° ; 38° ; elliptical 40°x10°
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 C°
Ts surface temperature	≤ 65 °C
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18(0,75mm ²) (Red;Black)+3xAWG20(0,5mm ²) (R/b, G/b, B/b) L. 1 m.
Weigth	2 Kg/m
Installations	Recessed (wall, floor) - surface mounted (wall, floor, ceiling)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power. Photometric data available at www.aldabra.it

STRATO Power LED RGB DATA-SHEET

GENERAL FEATURES:

	power (W)	length (mm)	pitch (mm)
STR.01.XXXXX.X	15	530	33
STR.02.XXXXX.X	29	1030	33
STR.03.XXXXX.X	44	1530	33
STR.04.XXXXX.X	58	2030	33

OPTICAL FEATURES:






STR.XX. M XXXX.X	Narrow beam 7°
STR.XX. F XXXX.X	Medium beam 24°
STR.XX. W XXXX.X	Wide beam 38°
STR.XX. E XXXX.X	Elliptical 40°x10°

LED FEATURES:

	Power LED
STR.XX.X 90 XX.X	R, G, B

FINISHES FEATURES:

STR.XX.XXX A1 .X	Anodized aluminium
-------------------------	--------------------



GENERAL INFORMATIONS:



Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must to be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

STRATO Power LED RGB DATA-SHEET

RECESSING BOXES:

CSF.0061.0
CSF.0062.0
CSF.0063.0
CSF.0064.0

standard recessing box 550 mm
standard recessing box 1050 mm
standard recessing box 1550 mm
standard recessing box 2050 mm



ACCESSORIES:

ACC.0065.0

couple of adjustable brackets



ACC.0066.0

fixing kit in recessing box



ACC.0080.0

couple of end caps for recessing box




ACC.0003.0

alignment kit for housing boxes



STRATO Power LED RGB move DATA-SHEET

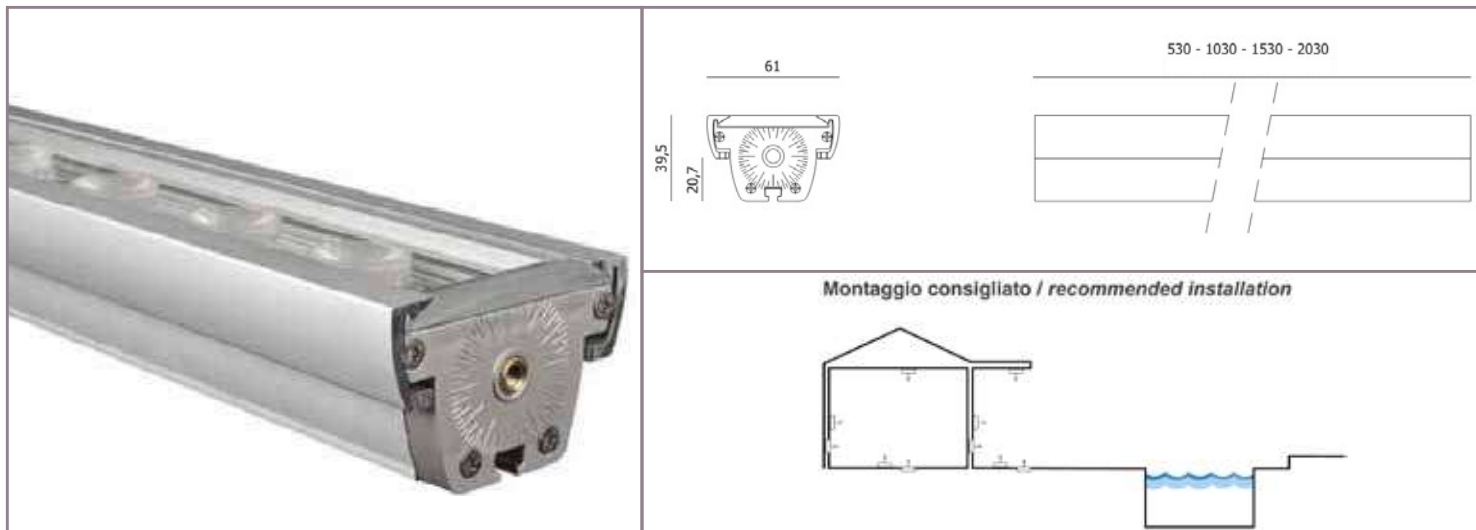

PRODUCT DESCRIPTION:

High performance professional lighting system for indoor and outdoor wall grazing. Advanced optical glare control. Body finished aluminium anodized, with 5mm transparent PMMA. UV resistance of all materials.

TECHNICALS FEATURES:

Materials	Aluminium ANTICORODAL EN AW-6060 galvanized 20 micron ; Stainless steel AISI 316L ; 5mm Transparent PMMA
Finishes	Anodized aluminium
Power Supply	24 Vdc constant voltage (±5%)
Power	80 W/m
Light Source	Power LED
Pitch	50 mm
Dominant Wavelength	R=622nm, G=530nm, B=470nm
Lifetime	> 50000 h (L80B20)
Optics	45° ; transparent diffuser 82°
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 C°
Ts surface temperature	≤ 65 °C
Functions	On/Off ; dimmable
Cable	In: AWM style 20233 2xAWG18(0,75mm ²) (Red;Black)+2xAWG20(0,5mm ²) (R/b, B/b) L. 1 m. Out: AWM style 20233 2xAWG18(0,75mm ²) (Red;Black) L. 1 m.
Weigth	2 Kg/m
Installations	Recessed (wall, floor) - surface mounted (wall, floor, ceiling)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power. Photometric data available at www.aldabra.it

STRATO Power LED RGB move DATA-SHEET

GENERAL FEATURES:

	power (W)	length (mm)	pitch (mm)
STR.09.XXXXX.X	40	530	50
STR.10.XXXXX.X	80	1030	50
STR.11.XXXXX.X	120	1530	50

OPTICAL FEATURES:



STR.XX.WXXXX.X	Wide beam 43°
STR.XX.TXXXX.X	Transparent diffuser 82°

LED FEATURES:


	Power LED
STR.XX.X92XX.X	R, G, B

FINISHES FEATURES:

STR.XX.XXXA1.X	Anodized aluminium
----------------	--------------------

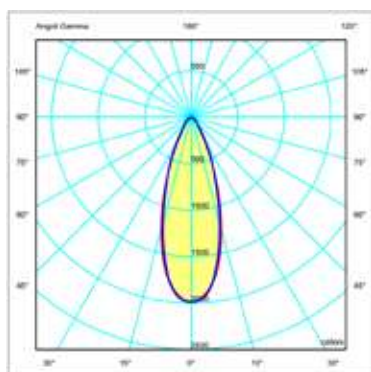

Wide beam 45°

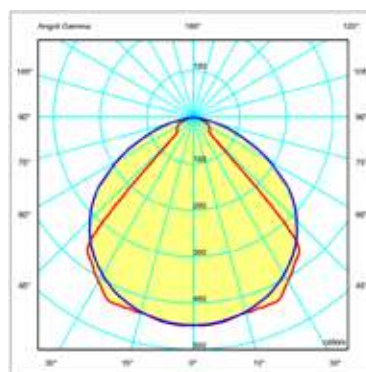

Transparent diffuser 82°

GENERAL INFORMATIONS:



Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

STRATO Power LED RGB move DATA-SHEET

RECESSING BOXES:

CSF.0061.0
CSF.0062.0
CSF.0063.0
CSF.0064.0

standard recessing box 550 mm
standard recessing box 1050 mm
standard recessing box 1550 mm
standard recessing box 2050 mm



ACCESSORIES:

ACC.0065.0

couple of adjustable brackets



ACC.0066.0

fixing kit in recessing box



ACC.0080.0

couple of end caps for recessing box



ACC.0003.0

alignment kit for housing boxes

