

# Gunn wash

## Product Description


Professional LED angled downlight with dual reflector system to provide smooth glare-free output. Available in either 15 or 21 Watt models. Multi-chip technology means constant colour temperature. Assembled in Australia from corrosion resistant componentry. Easily customised.

## Product Details

Application	Wall Washing
Trim Colours	White Black Custom Colours
Reflector Finishes	Dark Satin, White, Black Ice Blue, Rose, Mustard Champagne, Gold
Materials	Anodised aluminium reflector and heatsink. 304 stainless steel fascia

## Technical Data

Input Power	240V 350mA (15W) or 500mA (21W) driver c/w flex and plug
Power Consumption	15W or 21W
Colour Temperature Available	2700K 3000K 4000K
Lumen Output	
(15W) 2700K	900 lm
(15W) 3000K	1000 lm
(15W) 4000K	1100 lm
(21W) 2700K	1200 lm
(21W) 3000K	1363 lm
(21W) 4000K	1500 lm
CRI	92
Lumen Maintenance	70% at 50 000 hrs
Dimming	- TR Leading/Trailing Edge (Standard) - DD Dali Dim - DC 1-10V DC Control
Cut Out	90mm

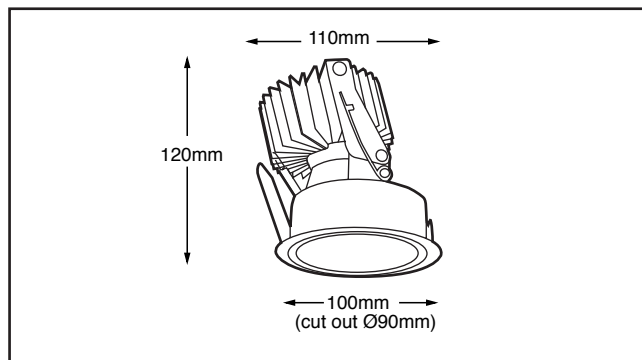

## Order Information

Specify fitting options as per example below to order.

Example: **GW** - **15W** - **2** - **15R** - **27K** - **NB** - **TR**

Fitting	Watts	Colour	Reflector	CCT	Beam	Dimming
<b>GW</b>	-	-	-	-	-	-
<b>GW</b> Gunn Wash	<b>15W</b> 15 Watts <b>21W</b> 21 Watts	<b>2</b> Black <b>3</b> White <b>6</b> Silver <b>5</b> Custom	<b>15R</b> Gold <b>16R</b> Rose <b>2R</b> Black <b>3R</b> White	<b>17R</b> Mustard <b>18R</b> Champagne <b>10R</b> Dark Satin <b>11R</b> Ice Blue	<b>27K</b> 2700K <b>3K</b> 3000K <b>4K</b> 4000K	<b>NB</b> Narrow Beam (24°) <b>MB</b> Medium Beam (38°) <b>WB</b> Wide Beam (60°)
						<b>TR</b> Leading/Trailing <b>DD</b> Dali Dim <b>DC</b> 1-10V DC Control

### Standard Reflector Colours

White

Specular

Gold

Black

Champagne



### Special Reflector Colours

Rose

Mustard

Ice Blue

Dark Satin



Reflectors are shown illuminated.